

# Wotech Solar

your best PV supplier!

## TWINPLUS MODULE SERIES

HIGH EFFICIENCY MONO-PERC M4-9B-R

# 360-380W



### OUTSTANDING PRODUCT PERFORMANCE


- Competitive high-temperature performance with ameliorated temperature coefficient
- Minimized power loss in cell connection
- Better performance under shading effect
- Decreased nominal operating cell temperature to  $43 \pm 2^\circ\text{C}$
- Higher power generation with multi-busbar and half-cut technology

### TRUSTWORTHY QUALITY AND RELIABILITY

- Guaranteed 0~+5W positive tolerance secures reliable power output
- 5400Pa maximum snow load, 2400Pa maximum wind load
- Optimized electrical design lowers hot spot risk and operating current

### PID RESISTANT

- Industry-leading cell processing technology and electrical design ensure solid PID resistance

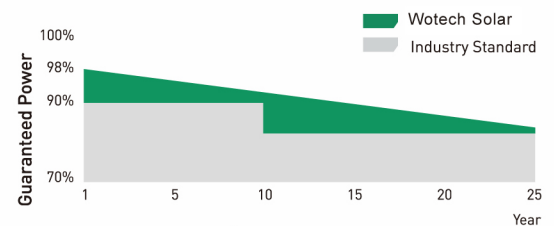

12-year Product Warranty | 25-year Linear Performance Warranty

### MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001:2015 / Quality management system

ISO 14001:2015 / Standards for environmental management system

OHSAS 18001:2007 / International standards for occupational health & safety

IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules-guidelines for increased confidence in PV module design qualification and type approval



Bloomberg Tier1  
NEW ENERGY FINANCE



## ELECTRICAL TYPICAL VALUES

Model	WT360WP		WT365WP		WT370WP		WT375WP		WT380WP	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Power (P <sub>mpp</sub> )	360	266	365	270	370	274	375	277	380	281
Rated Current (I <sub>mpp</sub> )	10.68	8.63	10.75	8.69	10.82	8.74	10.89	8.80	10.96	8.86
Rated Voltage (V <sub>mpp</sub> )	33.71	30.84	33.96	31.06	34.20	31.28	34.44	31.50	34.68	31.72
Short Circuit Current (I <sub>sc</sub> )	11.15	9.01	11.23	9.07	11.31	9.14	11.40	9.21	11.49	9.28
Open Circuit Voltage (V <sub>oc</sub> )	40.69	37.22	40.81	37.33	40.97	37.48	41.18	37.67	41.37	37.85
Module Efficiency (%)	19.62		19.90		20.17		20.44		20.71	

STC(Standard Testing Conditions):Irradiance 1000W/m<sup>2</sup>, AM 1.5, Cell Temperature 25°C

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

## MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline 166mm x 83mm
	Length: 1764mm (69.45 inch)
Dimension (L× W × H)	Width: 1040mm (40.94 inch) Height: 35mm (1.38 inch)
Weight	20.0kg (44.09 lbs)
Front Glass	3.2mm Toughened Glass
Frame	Anodized Aluminium Alloy
Cable	4mm <sup>2</sup> (IEC), Length:350mm (vertical) 1150mm (horizontal) or Customized Length
Junction Box	IP 68 Rated

## TEMPERATURE RATINGS

Voltage Temperature Coefficient	-0.30%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.38%/°C
Tolerance	0~+5w
NOCT	43±2°C

## ABSOLUTE MAXIMUM RATING

Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	20A
PV Module Classification	II
Fire Rating (IEC 61730)	C
Module Fire Performance(UL 61730)	Type 4
Maximum System Voltage	DC 1500V/1000V

## PACKING CONFIGURATION

Container	20' GP	40' HQ
Pieces/Container	306	806

## ELECTRICAL CHARACTERISTICS

